



Model NV-16PS13-PVD Power Supply Passive Video Receiver Hub



Front



Rear



Features:

- Provides Class 2 SELV camera power while receiving video transmission and delivering P/T/Z telemetry all over a single 4-pair Cat5e cable
- Standard telecom/datacom structured cabling pinouts per EIA/TIA 568B
- Independently selectable 24VAC-OFF-28VAC with 1 Amp per channel*
- Automatic-reset fault protection; transient protection
- Individually floating outputs ensure total ground-loop immunity
- Diagnostic LEDs show load/no load, miswires, and overload conditions
- Use with the NV-216A-PV, NV-218A-PVD, or NV-226J-PV transceiver at the camera
- Power cameras via UTP over significant distances (See Power Distance Chart)
- 1U high; 12" deep; wall, desk, or rack-mountable, 2ft (60cm) BNC Cables included
- Limited lifetime warranty

The 16-channel NV-16PS13-PVD is a key hybrid component that consolidates all CCTV system cabling using standard EIA/TIA 568B structured building wiring. Designed for installation in the IDF/Telecom Closet or MDF/Equipment Room, the Power Supply Passive Video Receiver Hub has independently selectable 24VAC-OFF-28VAC outputs that can support at-distance camera loads up to 1 Amp per channel (10 Amps aggregate). Use with NVT's PVD™ transceivers for cable runs under 750ft (225m). A built-in passive receiver hub allows connection to DVR or an encoder for IP transmission. Per-channel diagnostic LEDs display load/no-load, miswires, or fault conditions at a glance. Automatic-reset fault protection, transient protection, and ground loop free individually floating outputs.

*10 Amps, aggregate

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
nvt.com • info@nvt.com



Model NV-16PS13-PVD

Power Supply Passive Video Receiver Hub

Technical Specifications

WIRE DISTANCE (Power Distance Charts)

Supply voltage, wire resistance and minimum camera operating voltage determine the maximum camera distance. Examples assume a minimum 21VAC at the camera:

Fixed 24VAC Camera		NV-216A-PV	
Power Supply Voltage	24 VAC	28 VAC	
Minimum Voltage at Camera	21 VAC	21 VAC	
B&W Camera 100 mA, 2.4 W			
2-pair 24 AWG	899ft (274m)	2,098ft (640m)	
2-pair 23 AWG (Cat6)	1,134ft (346m)	2,645ft (807m)	
Color Camera 200 mA, 4.8 W			
2-pair 24 AWG	450ft (137m)	1,049ft (320m)	
2-pair 23 AWG (Cat6)	567ft (173m)	1,323ft (403m)	
Color Camera 300 mA, 7.2 W			
2-pair 24 AWG	300ft (91m)	699ft (213m)	
2-pair 23 AWG (Cat6)	378ft (115m)	862ft (269m)	

P/T/Z 24VAC Camera		NV-218A-PVD	
Power Supply Voltage	24 VAC	28 VAC	
Minimum Voltage at Camera	21 VAC	21 VAC	
P/T/Z Camera 1,000 mA, 24 W			
2-pair 24 AWG	90ft (27m)	210ft (64m)	
2-pair 23 AWG (Cat6)	113ft (35m)	265ft (81m)	

Fixed 12VDC Camera		NV-226J-PV	
Power Supply Voltage	24 VAC	28 VAC	
Minimum Voltage at Camera	11.5 VDC	11.5 VDC	
B&W Camera 200 mA, 2.4 W			
2-pair 24 AWG	1,498ft (457m)	2,098ft (640m)	
2-pair 23 AWG (Cat6)	1,889ft (576m)	2,645ft (807m)	
Color Camera 400 mA, 4.8 W			
2-pair 24 AWG	874ft (267m)	1,174ft (358m)	
2-pair 23 AWG (Cat6)	1,102ft (336m)	1,480ft (452m)	

Notes: Wire should be Cat5 or better/ low voltage camera power, video and RS-422 or RS-485 data may reside within the same wire bundle, however do not run 24 or 28VAC within the same wire bundle as other telecom or datacom signals.

VIDEO

Frequency response	DC to 5 MHz
Attenuation	0.5 dB typ
Common-mode / Differential-mode rejection	
15 KHz to 5 MHz	60 dB typ
Impedance	
Coax, female BNC	75 ohms
UTP, RJ45	100 ohms
Network Wiring	One four-pair Cat5 or better per channel

CAMERA POWER

Each camera is powered by a fully isolated (floating) Class 2 SELV output, individually switchable 24VAC / Off / 28 VAC at up to 1 Amp (10 Amps aggregate). Each output is individually thermistor protected for auto-reset after fault removal.

POWER

Power inlet	IEC with molded power cord (included)
Voltage	115 / 230V
Current	3.0 / 1.5 Amps
Protection	5x20mm type T fuse 5Amp 250V
Wattage	325 Watts
Heat	(power supply only) 125 BTU / Hour (power supply with cameras) 1,200 BTU / Hour

FRONT PANEL LEDs

System Power:	Blue LED
Per-channel LED Indicates:	
Off	No load connected
Green	Load connected and working
Amber	Mis-wiring detected
Red	Overload fault condition

ENVIRONMENTAL

Ambient Temperature	-4 to +122 °F (-20 to +50 °C)
Minimum airflow	20ft ³ /min (0.5m ³ / min)
Humidity (non-condensing)	0 to 95%
Transient Immunity	per ANSI / 587 C62.41

MECHANICAL

Dimensions, including connectors	19in wide, 1.73in high, 12in deep 43cm wide, 4.5cm high, 20cm deep
Weight	24.9lb (11,3kg)

ACCESSORIES (included)

Mounting	Rack mount "L" brackets for front, rear, or wall installations; rubber feet for desk applications
Cables	Sixteen 2ft (60cm) coax jumpers Molded IEC power inlet cord 7ft (200cm)

OPTIONAL EQUIPMENT

Mounting	NV-RMBK2 Rear Mount Support Kit (designed for use with thinner metal equipment racks) NV-WMBK2 Wall Mount Bracket Kit (heavy duty)
----------	---

REGULATORY



Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
nvt.com • info@nvt.com




Model NV-16PS13-PVD

Power Supply Passive Video Receiver Hub


CAMERA PVD CONNECTIONS

Sixteen front-panel RJ45 outputs support up to sixteen fixed or P/T/Z telemetry cameras over 4-pair UTP Cat5 or better.



CONTROL ROOM DATA

RS-422 or RS-485 type P/T/Z telemetry / data signals are paralleled together in groups of four, and passed through the unit and delivered to the control room via a rear-panel RJ45 connector.




Specifications subject to change without notice.

Channel 1	Channel 2	Channel 3	Channel 4	Channel 5	Channel 6	Channel 7	Channel 8
1 Video 1+	1 Video 2+	1 Video 3+	1 Video 4+	1 Video 5+	1 Video 6+	1 Video 7+	1 Video 8+
2 Video 1-	2 Video 2-	2 Video 3-	2 Video 4-	2 Video 5-	2 Video 6-	2 Video 7-	2 Video 8-
3 Data A +	3 Data A +	3 Data A +	3 Data A +	3 Data B +	3 Data B +	3 Data B +	3 Data B +
4 Power 1-	4 Power 2-	4 Power 3-	4 Power 4-	4 Power 5-	4 Power 6-	4 Power 7-	4 Power 8-
5 Power 1+	5 Power 2+	5 Power 3+	5 Power 4+	5 Power 5+	5 Power 6+	5 Power 7+	5 Power 8+
6 Data A -	6 Data A -	6 Data A -	6 Data A -	6 Data B -	6 Data B -	6 Data B -	6 Data B -
7 Power 1+	7 Power 2+	7 Power 3+	7 Power 4+	7 Power 5+	7 Power 6+	7 Power 7+	7 Power 8+
8 Power 1-	8 Power 2-	8 Power 3-	8 Power 4-	8 Power 5-	8 Power 6-	8 Power 7-	8 Power 8-
Channel 9	Channel 10	Channel 11	Channel 12	Channel 13	Channel 14	Channel 15	Channel 16
1 Video 9+	1 Video 10+	1 Video 11+	1 Video 12+	1 Video 13+	1 Video 14+	1 Video 15+	1 Video 16+
2 Video 9-	2 Video 10-	2 Video 11-	2 Video 12-	2 Video 13-	2 Video 14-	2 Video 15-	2 Video 16-
3 Data C +	3 Data C +	3 Data C +	3 Data C +	3 Data D +	3 Data D +	3 Data D +	3 Data D +
4 Power 9-	4 Power 10-	4 Power 11-	4 Power 12-	4 Power 13-	4 Power 14-	4 Power 15-	4 Power 16-
5 Power 9+	5 Power 10+	5 Power 11+	5 Power 12+	5 Power 13+	5 Power 14+	5 Power 15+	5 Power 16+
6 Data C -	6 Data C -	6 Data C -	6 Data C -	6 Data D -	6 Data D -	6 Data D -	6 Data D -
7 Power 9+	7 Power 10+	7 Power 11+	7 Power 12+	7 Power 13+	7 Power 14+	7 Power 15+	7 Power 16+
8 Power 9-	8 Power 10-	8 Power 11-	8 Power 12-	8 Power 13-	8 Power 14-	8 Power 15-	8 Power 16-

Typical Application

Camera Location and Transmitter Connections

IDF / Telecoms Room or MDF / Control Room Receiver Connections

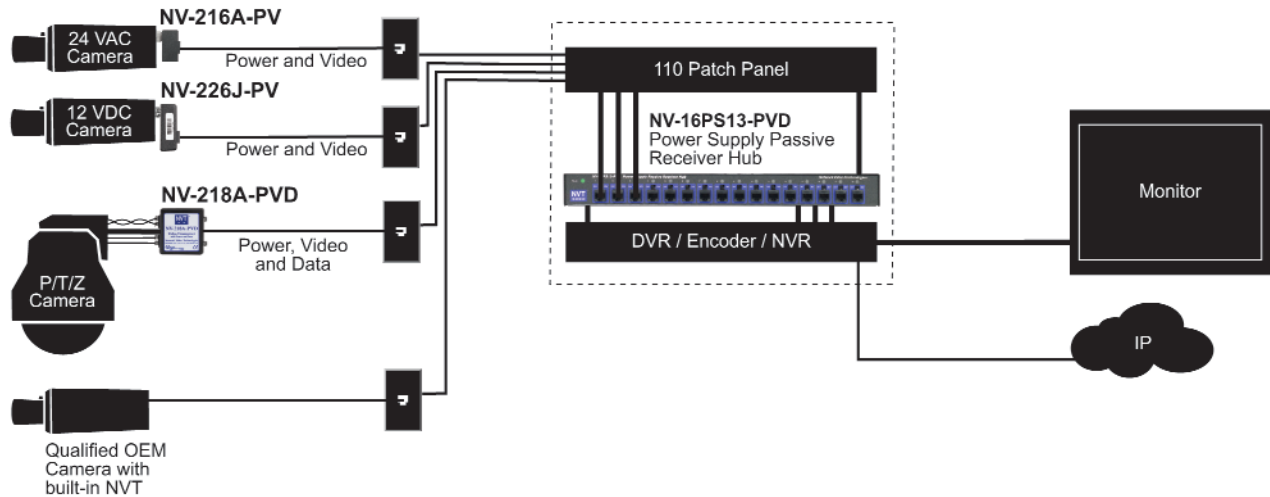

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
 (+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
 nvt.com • info@nvt.com

Copyright © 2008 NVT, Inc.
 411-1613-1-C